B-2 PRO

TUDIO CONDENSER MICROPHONE

Technical Specifications

Version 1.0 September 2002



Transducer type: condenser, 1" dual-diaphragm

Operating principle: pressure gradient

Polar pattern: cardioid, omnidirectional or figure eight Connection: gold-plated balanced XLR connector Open circuit sensitivity (at 1 kHz): cardioid: -36 dBV (0 dBV = 1 V/Pa), 16 mV/Pa

omnidir.: -37 dBV (0 dBV = 1 V/Pa), 14 mV/Pa figure eight: -35 dBV (0 dBV = 1 V/Pa), 18 mV/Pa

Frequency response: 20 Hz - 20 kHz Level attenuation: -10 dB (switchable)

Low-Cut filter: 6 dB/oct. at 150 Hz (switchable)
Max. SPL (1% THD @ 1 kHz): cardioid: 138 dB (0 dB), 148 dB

cardioid: 138 dB (0 dB), 148 dB (-10 dB) omnidir.: 139 dB (0 dB), 149 dB (-10 dB) figure eight: 137 dB (0 dB), 147 dB (-10 dB)

Equivalent SPL (IEC 651): 17 dB-A (cardioid)

18 dB-A (omnidirectional) 16 dB-A (figure eight)

Signal-to-noise ratio: 77 dB, A-weighted (cardioid)

76 dB, A-weighted (omnidirectional) 78 dB, A-weighted (figure eight)

 $\begin{array}{lll} \mbox{Nominal impedance:} & <100 \ \Omega \\ \mbox{Load impedance:} & >1 \ \mbox{k}\Omega \\ \mbox{Supply voltage:} & +48 \ \mbox{V} \\ \mbox{Supply current:} & 3 \ \mbox{mA} \end{array}$

Dimensions: Ø head: 56 mm, Ø shaft: 50 mm, length: 210 mm

Weight: approx. 0.55 kg


The information contained in this sheet is subject to change without notice. No part of this sheet may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER is a registered trademark. ALL RIGHTS RESERVED.

© 2002 BEHRINGER Spezielle Studiotechnik GmbH.
BEHRINGER Spezielle Studiotechnik GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchheide II, Germany
Tel. +49 (0) 21 54 / 92 06-0, Fax +49 (0) 21 54 / 92 06-30




www.behringer.com

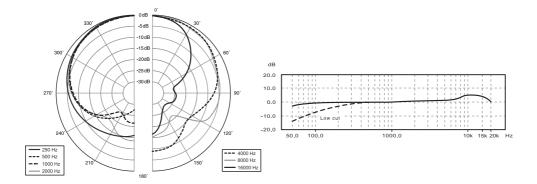


Polar pattern (cardioid)

Frequency response (cardioid)

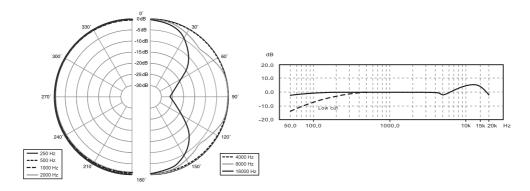

Polar pattern (omnidirectional)

Frequency response (omnidirectional)

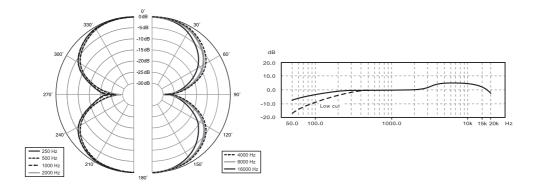

Polar pattern (figure eight)

Frequency response (figure eight)