


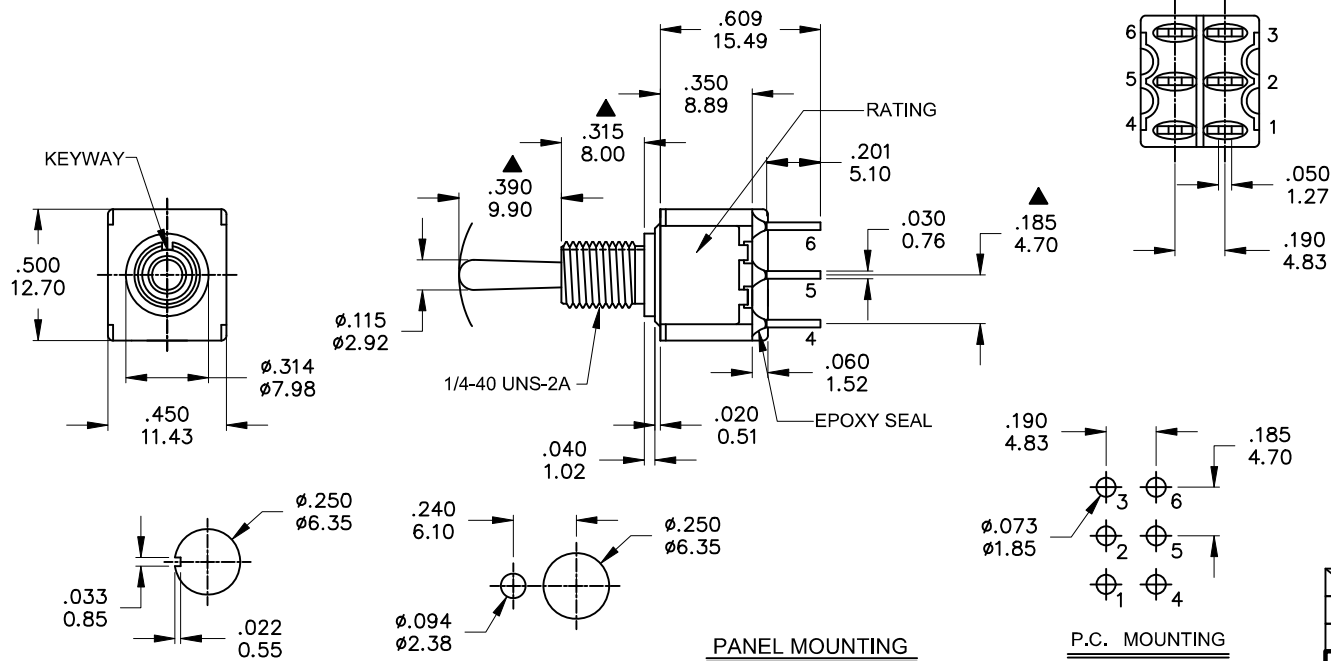

Without locking ring.

With standard locking ring.

Model No.	POS.1	POS.2	POS.3
1MD6	ON	ON	ON
Term. Comm.	2-3,5-6	2-3,5-4	2-1,5-4
SCHEMATIC			

SWITCH FUNCTION

	CONTACT PLATING	TERMINAL PLATING	RATINGS
Q	Silver	Silver	5 Amps @120 VAC or 28VDC
C	Gold over Silver	Gold over silver	2 Amps @250 VAC
R	Gold	Gold	0.4 Volt-Amps(VA) max. @20V max. (AC or DC)

PANEL MOUNTING

P.C. MOUNTING

SPECIFICATIONS

MECHANICAL LIFE: 40,000 make-and-break cycles.

CONTACT RESISTANCE: 10 mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000 MΩ min.

DIELECTRIC STRENGTH: 1,000 Vrms min.@sea level.

OPERATING TEMPERATURE: -40°C to 85°C.

MATERIALS

CASE: Diallyl phthalate (DAP) (UL94v-0).

ACTUATOR: Brass, Tin-Cobalt alloy over Ni plated.

BUSHING: Brass, nickel plated.

HOUSING: Stainless Steel.

TERMINAL/CONTACT: Copper.

RoHS & Lead Free

Warwick Gmbh & Co Music Equipment KG
Gewerbepark 46

D-08258 Markneukirchen

Tel: +49(0)37422 555-0

Fax : +49 (0) 37422 555-9999

e-mail : info@warwick.de

NAME

DAE

DRAWN

28/10/2024

CHKD

MEC

A-01

Scale 1 : 1

SHEET 1 OF 1


A4

M_80007_C_01


Copyright

This drawing is the property of Warwick Gmbh & Co Music Equipment KG.


The information given on it is protected by copyright and any form of copying or reproduction is stricly forbidden.

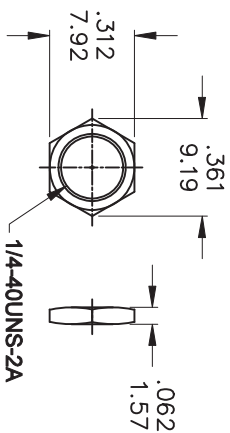

MNU-1M01A

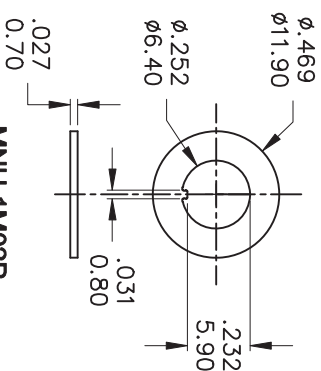

MNU-1M02P

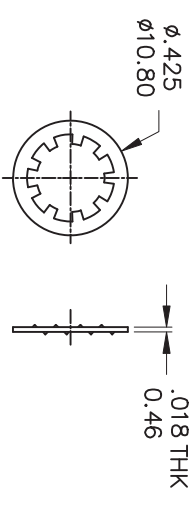

MNU-1M03

PART NO.	PART NAME	QTY
1 MNU-1M01A	1/4 INCH NUTS	2
2 MNU-1M02P	LOCKING RING	1
3 MNU-1M03	LOCKING WASHER	1



	NAME	DAE	M_8000	Warwick Gmbh & Co Music Equipment KG Gewerbepark 46 D-08258 Markneukirchen Tel: +49(0)37422 555-0 Fax: +49 (0) 37422 555-9999 e-mail: info@warwick.de
DRAWN	28/10/2024			
CHKD	MEC	A-01		
	Scale 1 : 1	SHEET 1 OF 1		

Copyright

This drawing is the property of Warwick Gmbh & Co
Music Equipment KG.
The information given on it is protected by
copyright and any form of copying
or reproduction is strictly forbidden.