


DL-Q 10-165/T



Technical Specifications:

Type:	DL-Q 10-165/T
Power:	10/6/3/1,5 W
Frequency Range:	80-11.800 Hz
<u>SPL 1W/1m:</u>	96,5 dB
<u>SPL Pmax/1m:</u>	112,2 dB
Dimensions:	220x220x72 mm
Ceiling Cut-out:	190 mm
Temperature range:	-20 / +80 °C °C
Dispersion angle (-10dB):	180° (H) / 180° (V)
Weight:	1,10 kg
Packing Unit:	12
Protection Class:	
Fire Protection (DIN4102):	
Mounting:	Screws
Connector:	
Colour:	RAL 9010

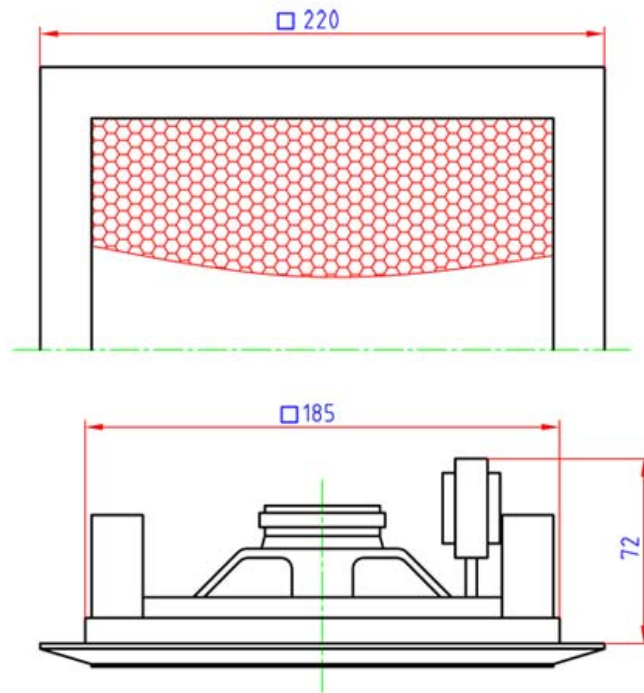


Product Attributes:




DL-Q 10-165/T

Frequency Diagrams:



Sound Pressure Level

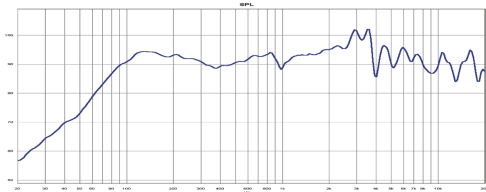

Impedance

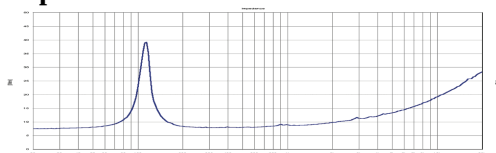

Polar Diagrams (H)

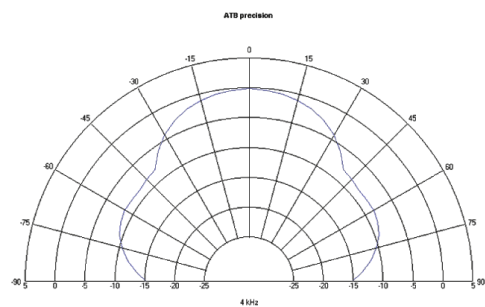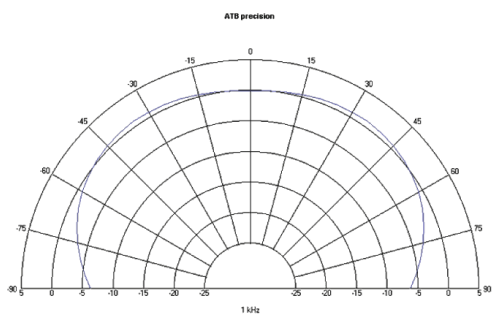



ic audio GmbH • Boehringerstraße 14a • D-68307 Mannheim • Germany
Fon: ++49 (0) 621 / 77096 -0 • Fax: ++49 (0) 621 / 77096 -26 • Email: info@ic-audio.com

DL-Q 10-165/T

Frequency Diagrams:

Measurements according to DIN IEC 268-5

Please note: Because of many different types of ceiling materials and ceiling strengths we recommend to build in a sample of the speaker to match the requirements accurately.

ic audio GmbH • Boehringerstraße 14a • D-68307 Mannheim • Germany
Fon: ++49 (0) 621 / 77096 -0 • Fax: ++49 (0) 621 / 77096 -26 • Email: info@ic-audio.com