



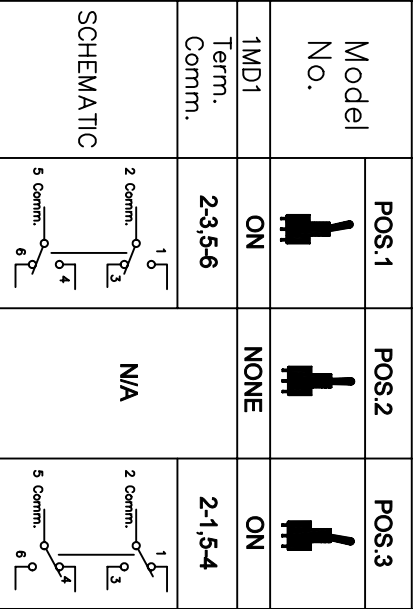


SWITCH FUNCTION

	CONTRACT PLATING	TERMINAL PLATING	RATINGS
Q	Silver	Q = Silver	5 Amps @120 VAC or 28 VDC 2 Amp @250VAC
S		S = Silver,pure-tin	
C		C = Gold over silver	
K	Gold over Silver	K = Gold over silver,pure-tin	
R		R = Gold	
G	Gold	G = Gold,pure-tin	0.4 Volt-Amps(VA) max. @20V max. (AC or DC)

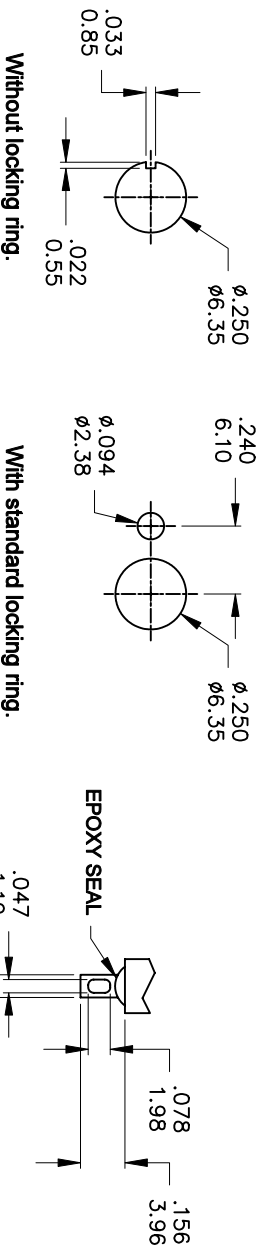

PANEL MOUNTING

SOLDER LUG

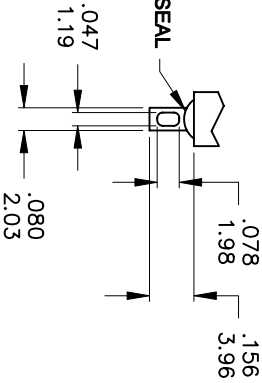

SPECIFICATIONS

MECHANICAL LIFE: 40,000 make-and-break cycles.
CONTACT RESISTANCE: 10m Ω max. Initial @ 2.4VDC
 100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000M Ω min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS

CASE: Diallyl phthalate (DAP) (UL94v-0).
ACTUATOR: Brass, chrome plated.
BUSHING: Brass, nickel plated.
HOUSING: Stainless Steel.
TERMINAL/CONTACT: Brass, Silver or gold plated.
RoHS: 2002/95/EC

	NAME		DAE	M_80002_C_01
DRAWN			28/10/2024	
CHKD	MEC		A-01	
	Scale 1 : 1	SHEET 1 OF 1	A4	



Warwick GmbH & Co Music Equipment KG

Gewerbepark 46

D-08258 Markneukirchen

Tel: +49(0)37422 555-0


Fax : +49 (0) 37422 555-9999

e-mail : info@warwick.de


Copyright

This drawing is the property of Warwick GmbH & Co
Music Equipment KG.


The information given on it is protected by copyright and any form of copying or reproduction is strictly forbidden.

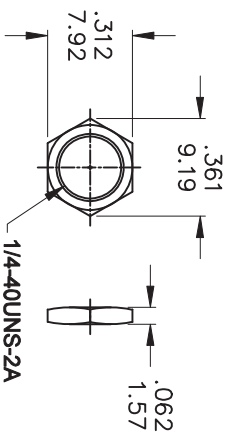

MNU-1M01A

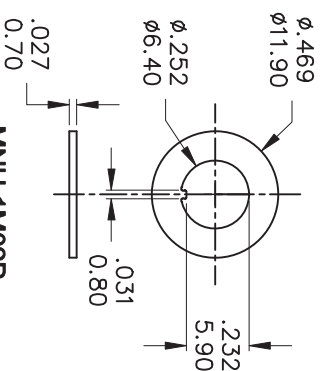

MNU-1M02P

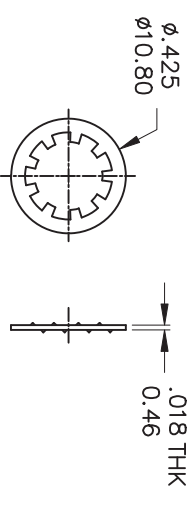

MNU-1M03

PART NO.	PART NAME	QTY
1 MNU-1M01A	1/4 INCH NUTS	2
2 MNU-1M02P	LOCKING RING	1
3 MNU-1M03	LOCKING WASHER	1



	NAME	DAE	M_8000	Warwick Gmbh & Co Music Equipment KG Gewerbepark 46 D-08258 Markneukirchen Tel: +49(0)37422 555-0 Fax: +49 (0) 37422 555-9999 e-mail: info@warwick.de
DRAWN	28/10/2024			
CHKD	MEC	A-01		
	Scale 1 : 1	SHEET 1 OF 1	A4	This drawing is the property of Warwick Gmbh & Co Music Equipment KG. The information given on it is protected by copyright and any form of copying or reproduction is stricly forbidden.

Copyright